


**PRODUCT DATA SHEET**

**Fiber Optic Terminal Box**

Fiber optic terminal box suitable for optical fiber splicing, distribution and protection. It is reasonable design for fiber arrangement, and for outdoor wall mounted and pole mounted application.

**Features:**

- Material: PP +GF
- 24 fibers, with 2pcs splice trays (Max. Can load 4pcs splice trays, 48 fibers)
- Can load 24pcs SC simplex adapter
- Each splice tray can put 1pc 1:8 PLC steel tube type splitter.
- 4pcs  $\Phi 18\text{mm}$  entry cable ports (with 2pcs  $\Phi 12\text{mm}$  gasket) & 16pcs 4mm drop cable ports
- Wall mounting and pole mounting application
- Waterproof, IP65, outdoor using

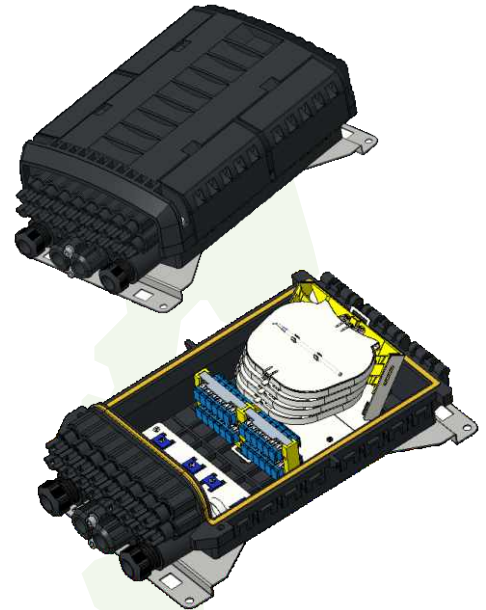


**Specification:**

Model	Capacity	Dimension	Adapter Port
NT-OTB-P037	Max. 48 fibers	411.5*243*143mm	24pcs SC simplex adapters


**Application:**

- FTTH access network.
- Telecommunication Networks
- CATV Networks
- Data communications Networks

**Dimension: (mm)**

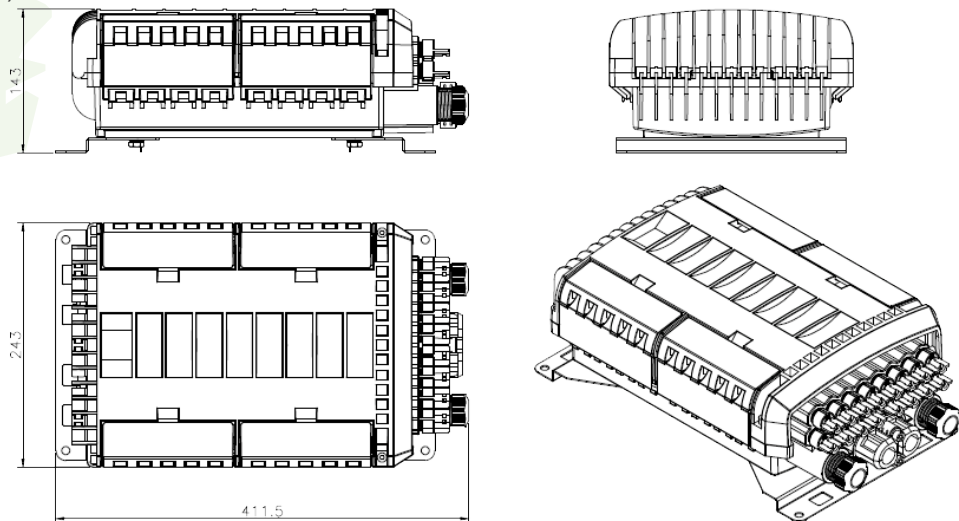


**Instruction:**

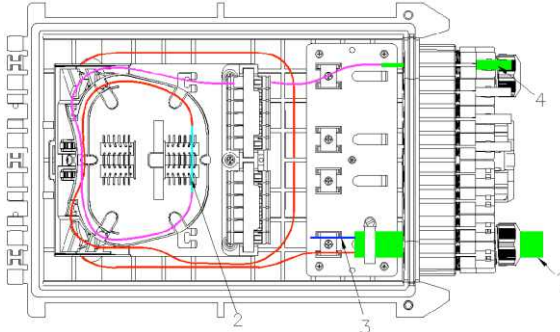

- 1-Cable entry port
- 2-Heat shrinkable protection sleeve
- 3-Cable fixing kit
- 4-Fiber optic fast connector (can get through output port)

**Wall-mount and pole mount bracket:**

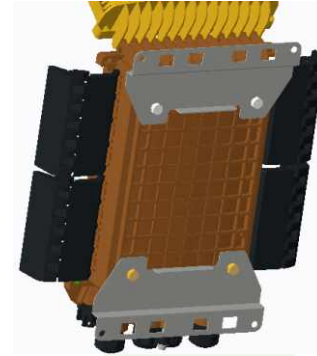

**Accessories:**

Item	Name	Specification	Unit	Qty
1	Clamp	18-32 stainless steel	PCS	4
2	Inner hexagon spanner	S5, black	PCS	1
3	Cable tube	Outside $\Phi$ 6mm, plastic, white	Meter	0.5
4	Expansion screw	M8*70 stainless steel	PCS	4
5	Cable tie	3mm*120mm, white	PCS	5
6	Insulating tape	0.15*17mm*8 yard, black	PCS	1
7	Cleaning cloth	6*6/5050 type	PCS	1
8	Heat shrinkable protect sleeve	60MM*2.3*1.0	PCS	24 or 48



**Packing information:**

Carton dimension (CM)	Weight (KG)	Remark
Inner carton 42*25.5*15CM	4.4	1 set per carton
Outside carton 53*43.5*33CM	17.6	4 sets per carton

