


PRODUCT DATA SHEET

WALL MOUNT, UNIQUE FEATURES FOR ZONE CABLING

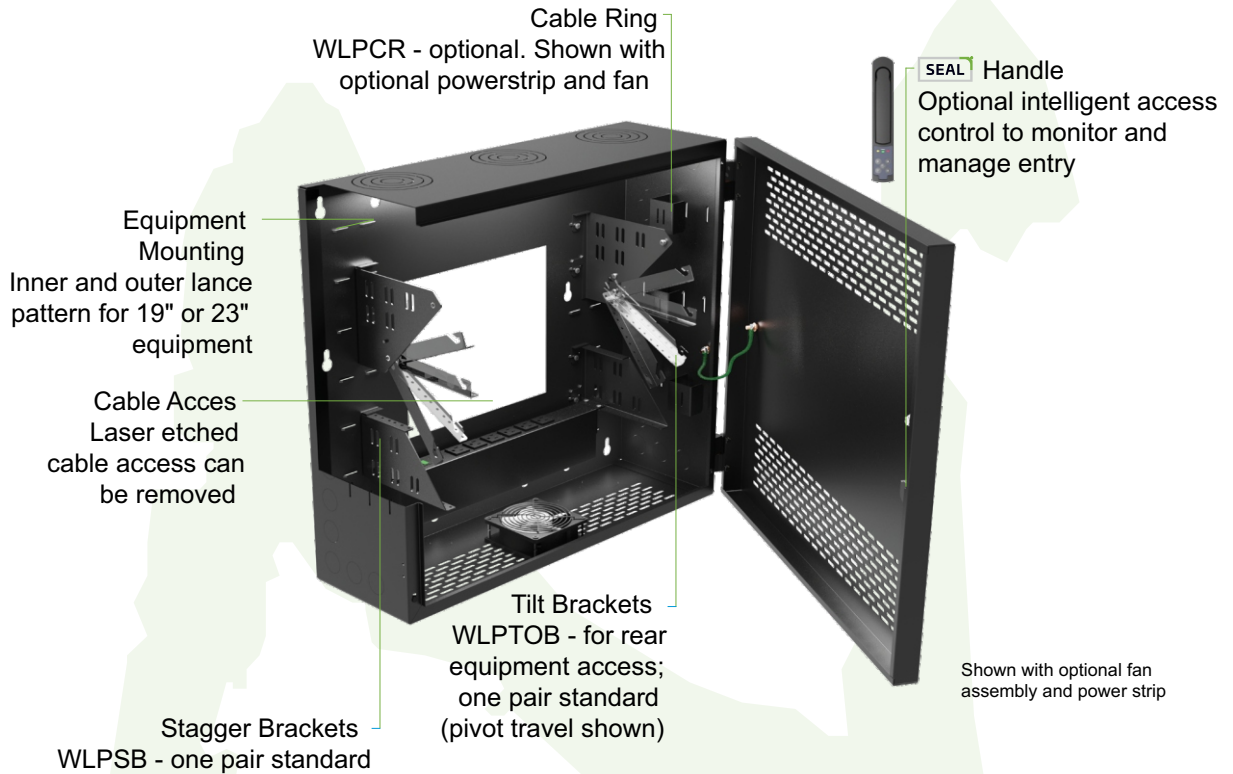

SEAL Security Ready. Add intelligent access to create a SEAL solution!


Height	Color	Handle	Airflow	Example
NTXXWLP	B-	XX-	XX-	Configured WM
24	B (Black)	SH (Swing Handle)	AF (Fan Included)3	NT24WLP-B-SH-AF
36		SC (SEAL Combo) 1	00 (None)	
48		SE (SEAL Electronic) 2		

1 4 Digit combination handle; 2 Electronic handle GL-SEAL-TL3RF; 3 One fan included with wall mounts; 36" and 48" can accept additional fan

FEATURES

- #12-24 tapped mounting brackets (19 or 23" mounting) that can be vertically adjusted
- One pair of 4 RMU tilt brackets and one pair of 6 RMU stagger brackets included
- Multiple nominal concentric conduit knockouts on top, bottom, sides, and back
- 150mm x 25mm standard door handle cutout
- Reversible mounting for left-hand or right-hand opening
- Standards: UL2416, RoHS II



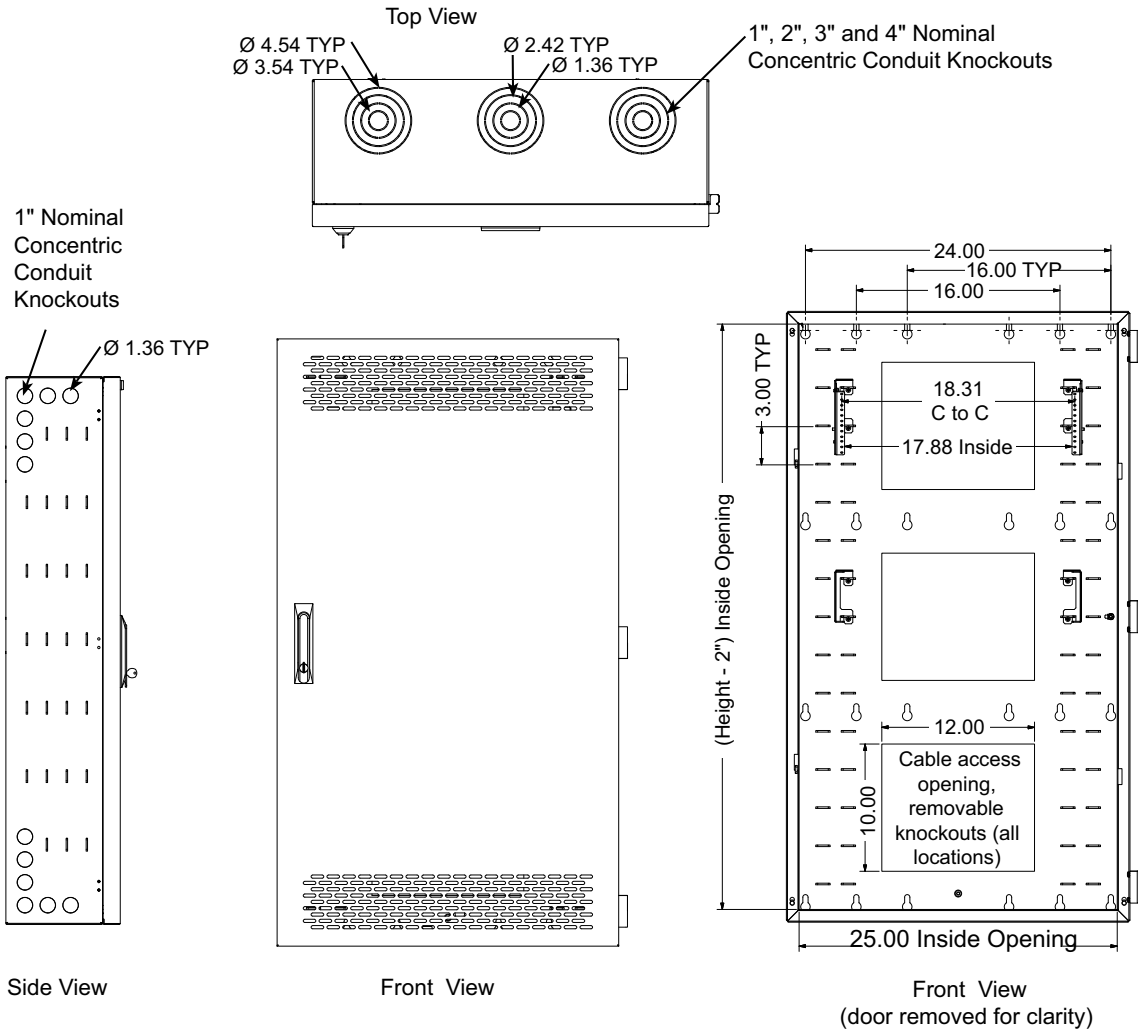

Specs	RMU	Weight Cap. lbs.
NT24WLP	6-10+	105
NT36WLP	6-10+	105
NT48WLP	6-10+	150

All sizes: 27"W x 10"D

POPULAR ACCESSORIES

- Description
- Fan assembly with one 75 CFM fan
- Copper Bus Bar for 19" mounting
- 6 receptacles, 5-15R receptacle, 5-15P plug, 15 amp, 125V power strip for 19" mounting
- Stagger bracket set, (top of bracket, 2 RMU; bottom of bracket, 4 RMU)
- Tilt-out bracket set, 4 RMU, for installation along mounting profile lances
- 3/4"W x 6"L, single black strap

