Nitrotel Manufacturing
Low Voltage Products & Fiber Optic

Part No.
NT-FOSC-V004-XXC-M

PRODUCT DATA SHEET

Mini Dome Fiber Optic Splice Closure 4 In-Out Ports

Description

Nitrotel supplies high quality fiber optic splice closures. Our dome type closures have the versatility and features that make it a perfect choice for fiber-to-the premise networks. The closure is an operable box which is made of high tension ABS industrial plastic which make it resistant to water, fire and shock. The dome and the end plate are sealed with rubber material and fixed tightly by a hoop. 3 ports cable with mechanical seal + Oval port (option round port). Protection IP68.

Features

Item	NT-FOSC-V004-XXC-M
Dimension (mm)	φ190x300
Weight (Kg)	1.2
Cable diameter (mm)	Φ7 - Φ21
Cable Entry & Exit	3-port + 1 oval
Max. capacity of cores per splice tray	12
Max. capacity of splice tray /closure	4 pcs splice tray.
Max. capacity of cores	48 cores
Sealing structure	Mechanical seal

Accessories:

1.Splice protector sleeve
2.Sealing washer
3.Allen wrench
4.Hardware for pole or wall mount.
5. Hardware fo cable/messenger hanging mount.

Application:

- CATV networks
- Telecommunications and fiber optic networks
- FTTx Networks
- Aerial-hanger, wall-mounting and direct buried

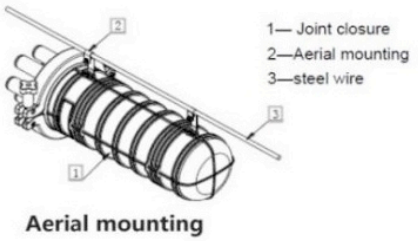

Aerial mounting

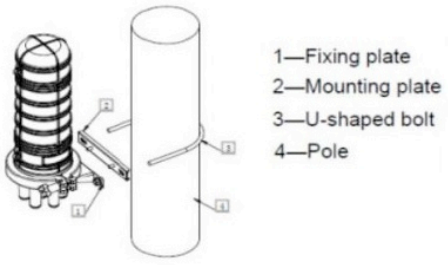

Pole mounting