

PRODUCT DATA SHEET

Fiber Terminal Box

Advantage

- 1.1 The box can be used in outdoor, overhead..etc
- 1.2 High quality impact material ABS
- 1.3 Designed for FTTH with adapter if need.
- 1.4 Modular fiber management system
- 1.5 Cable diameter range: 9~16
- 1.6 Sealing way of cables: mechanical
- 1.7 Quality warranty: 2 years
- 1.8 Life span: more than 15 years
- 1.9 IP rating is Ip68

NT-OTB20-T03A series of terminal box fiber closure conform the standard and relative regulations

Technical Indexes

(1)specification and model

Model: NT-OTB20-T03Aseries of fiber closures

Splice tray number/model NT-OTB20-T03A (single)
One splice tray 24 cores



(2) Dimension of output/input of box

Model	Cable Prot	Terminal Box Long (mm)	Terminal Box Wide (mm)	Terminal Box high (mm)	Cable Diameter Min (mm)	Cable Diameter Max (mm)	SC Adapter	FC Adapter	ST Adapter
T03A	4	245	172	80	10	16	12	12	12

If use 24SC plane the structure will be advise follow the picture

- 1 Operating Temperature: -25 °C-+40 °C
- 2 Storage temperature: -25°C - +55°C
- 3 Relative humidity: not more than 85% (30°C)
- 4 pressure: 70~106 kPa
- 5 Service Life: 10 years




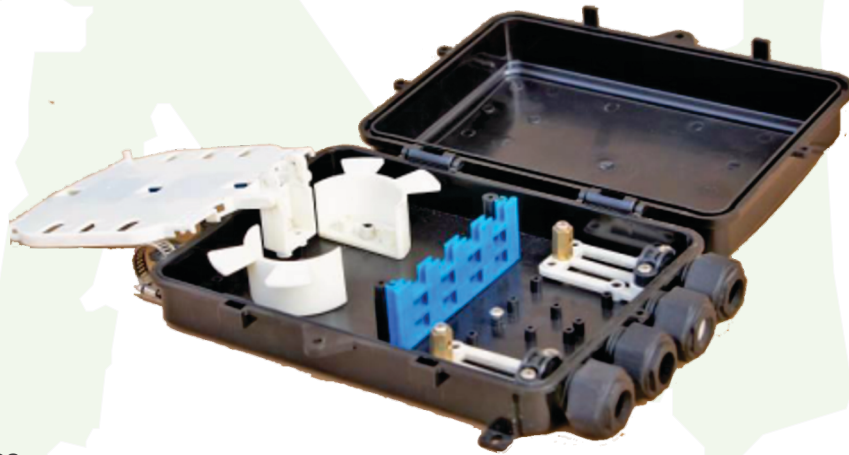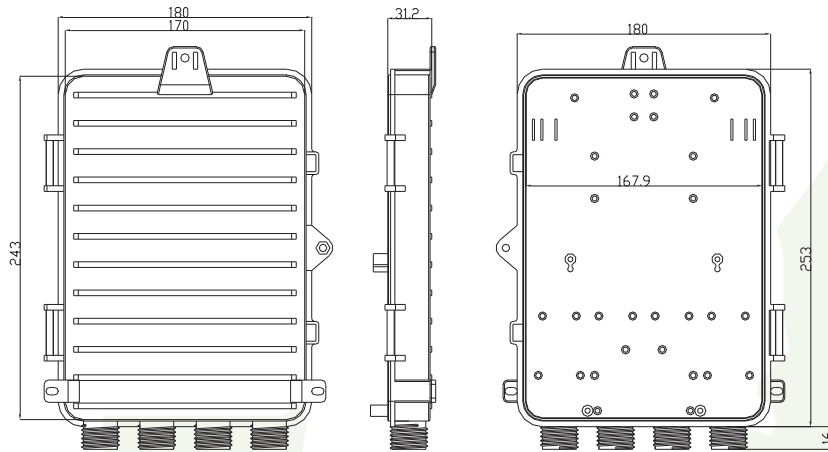

(3) Accessories



1. Fiber Protective Tube

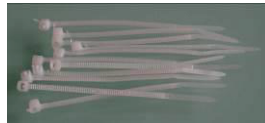

2. Cable fix tie



3. Adhesive tape



4. Label paper



5. Fiber protective tube



877.647.7721



sales@nitrotelmanufacturing.com



www.nitrotelmanufacturing.com

Rev. 06/26

