


PRODUCT DATA SHEET

Heavy-Duty Wall-Mount Cabinet

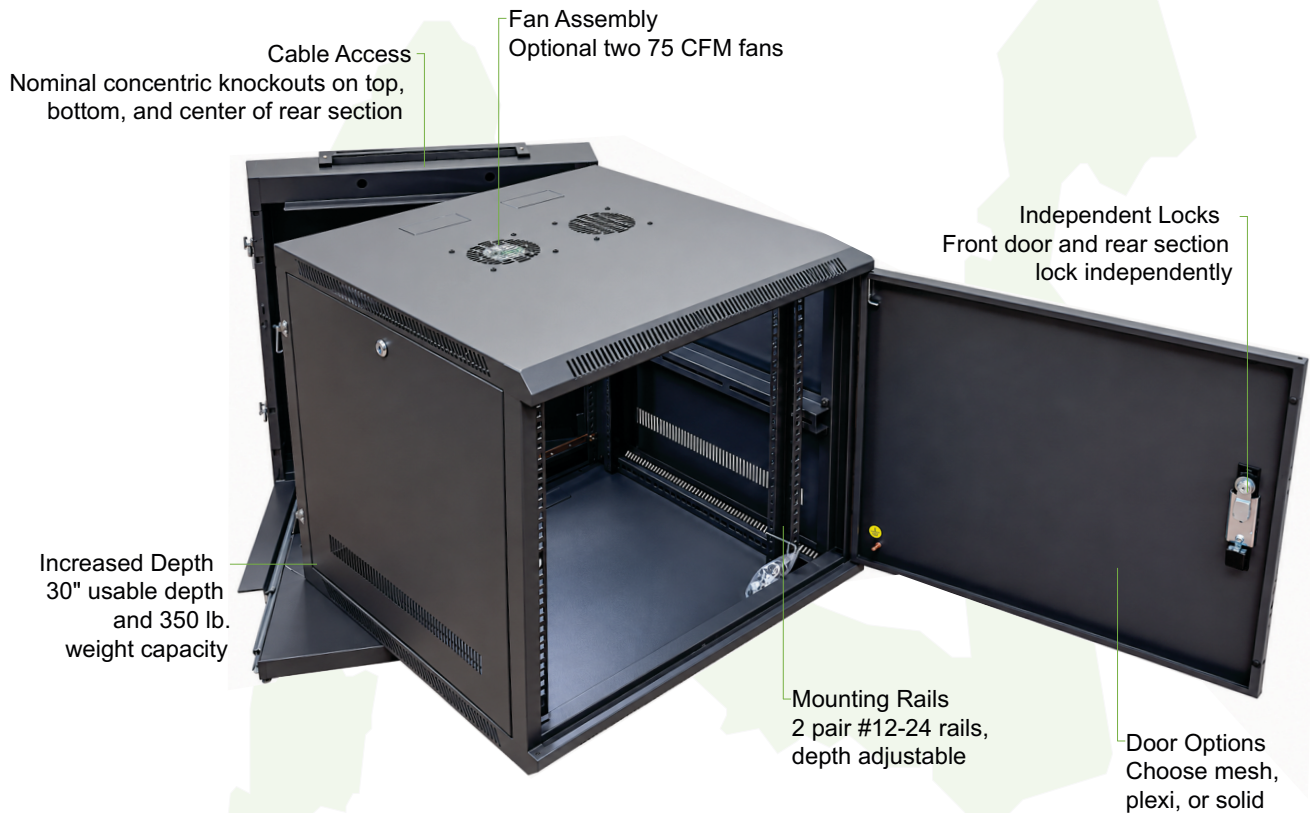


- Front door tempered glass (optional mesh or solid)
- Included 1 Fan (UL approved), optional second one
- Color Black (optional other colors)

FEATURES


- Two pair of #12-24 tapped mounting rails (depth adjustable)
- Optional dust kit to protect equipment in contaminated areas
- Independent keyed locks on front door and rear section
- Reversible mounting for left-hand or right-hand opening
- Optional casters to deploy wall mount as free-standing
- Standards: UL2416, RoHS II
- Led Light Back Access
- Removable Side Panel
- 3 Digit Handle Lock
- Grounding bar



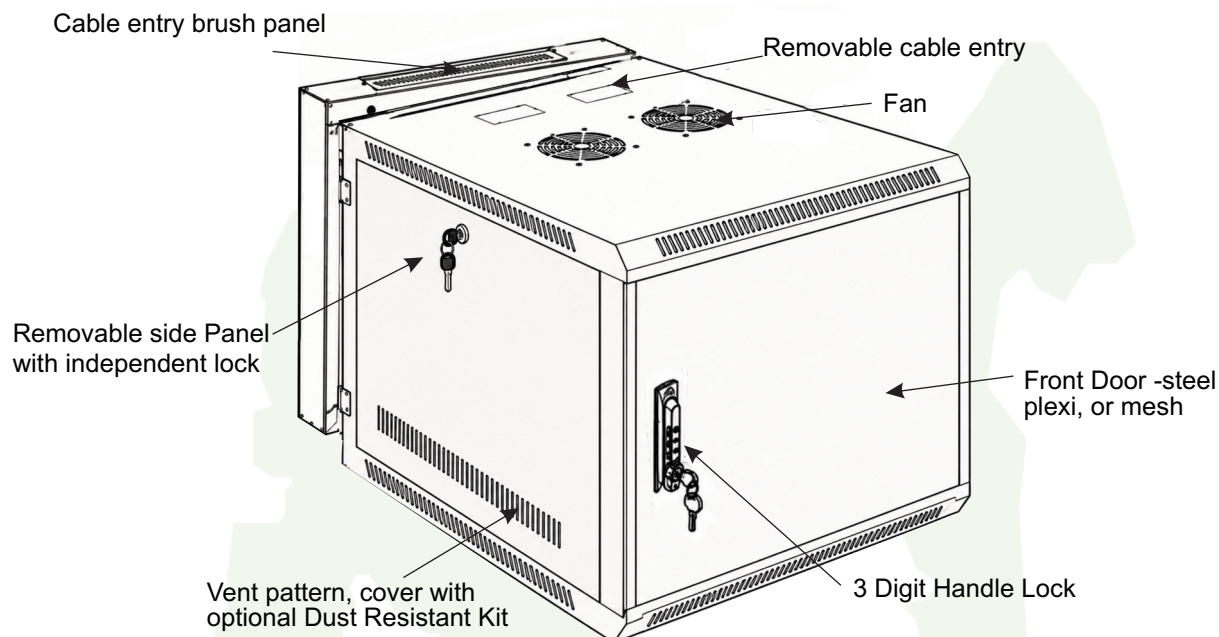


Specs	RMU	Weight Cap. Lbs.
NTDWC11U800-US-T	11	300
NTDWC12U800-US-T	12	310
NTDWC18U800-US-T	18	325
NTDWC24U800-US-T	24	340
NTDWC25U800-US-T	25	350

All sizes: 24"W x 32"D, 30" usable depth:
23" max. rail spacing.

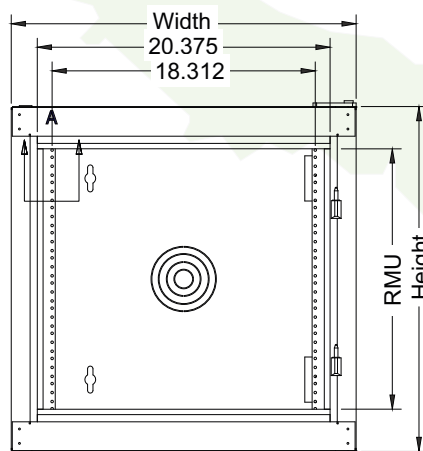

Front View
(without door)

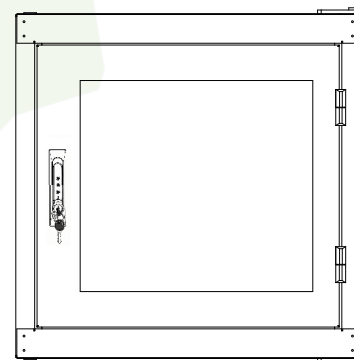

Front View
(with door)

POPULAR ACCESSORIES

Description

Horizontal cable organizer with five 3.5" x 5", ¼ turn "D" rings; 2 RMU

Horizontal cable organizer with five 1.5" x 3.5", ¼ turn "D" rings; 1 RMU

Horizontal PDU 19" 8 outlets 5-15 nema outlets with overload protection, 15 AMPS, METAL

Copper Bus Bar for 19" mounting

Dust resistant kit, includes cover plates and hardware

Stationary shelf (front/rear mount adjustable), 17.5"W x 18"D, 1 RMU, 150 lb. weight capacity

One set of 5 stem casters, increases weight capacity to 400 lbs.



877.647.7721



sales@nitrotelmanufacturing.com



www.nitrotelmanufacturing.com

Rev. 10/26