

PRODUCT DATA SHEET

Power Distribution Unit




**Specification**

Horizontal Mount, 19", Back-input, 10 outlet, NEMA515R sockets (2front, 8back), 1way, 15 Amp, Master over load Protection & Power Indicator, NEMA 5-15 Plug with 14 Gauge cable.

**DIMENSION TOLERANCES** (Unit: in)

Length: 18.90	Mounting Length: 18.31
Width: 4.57	Case length: 16.81
Height: 1.75	Case tolerances: _ +1.0
CableLength: 3ft, 6ft, 10ft, 12ft	



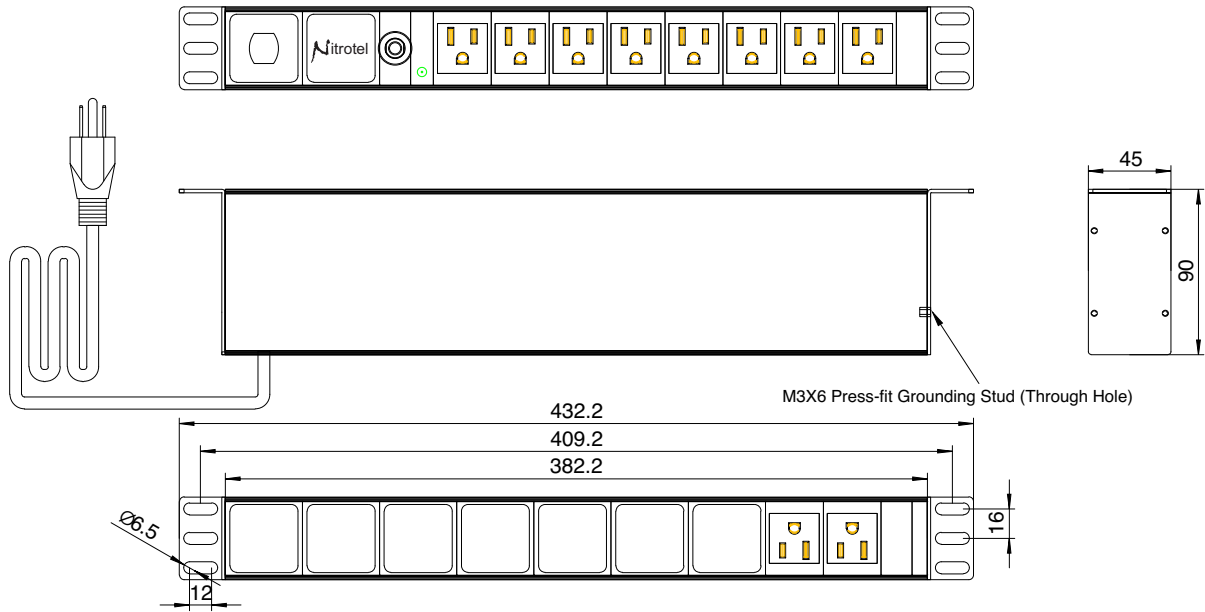

Technical Requirements						
NO.	Item	Basic Description				
1	Electric parameter	Rated voltage:	110V AC	Rated current:	15A	Maximum power: 1650W
2	Enclosure Requirements	size:	1U(1UA)	Material:	aluminum alloy	color: BLACK
3	PDU Installation Method	Horizontal mounting (ears mounted upright)				
4	Standard sockets/number of sockets	10-position 15A American-style hole				
5	Control indication function	indicator lights				
6	Protection and monitoring functions	Overload (15A)				
7	Power cord specifications	14AWG*2M+American-style injection head				
8	Power cord fixing method	A4 line buckle				
9	Internal linking technology	Main line 14AWG				
10						
...						

Module installation order	
Front:	Logo panel * 7 + 2 15A American-style holes + 4/10 divider + 2/10 divider
Back:	A4 cable clip + logo panel + overload indicator + indicator light + 8 15A American-style holes + 4/10 divider

